
# UDU 11 T P/F AW (SFTS)

Refillable touchless foam soap dispenser (1200 ml) made of stainless steel with Smart From the Start technology
Art. No. 1425067

**OPHARDT HYGIENE-TECHNIK GmbH**
Lindenau 27 | 47661 Issum | Germany
Tel.: +49 (0) 28 35 18-10 | Fax +49 (0) 28 35 18-77
planer@ophardt.com | www.ophardt.com

**UDU 11 X10 Touchless**

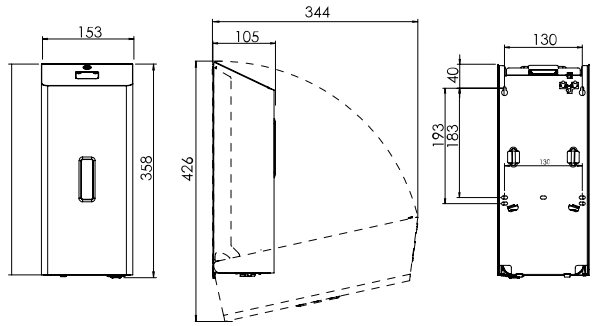


Maße in mm - Dimensions in mm



5 YEAR OPHARDT WARRANTY

**References**
airports, train stations, schools, kindergardens, hotels, restaurants, commercial kitchen, food processing areas, prisons, exhibitions, conference centres, shopping centres, fitness and sports centres, industry, laboratories, administration facilities

**Usage examples**
washrooms, toilets, baths, nursing and examination rooms, kitchens, production facilities, entrance area

**Technical data**

| | |
|---|---|
| Dispenser type: | refillable dispenser |
| Housing: | Stainless steel, white powder-coated (RAL 9016 Traffic White) |
| Back plate: | Stainless steel |
| Filling volume (ml): | 1200 ml |
| Dosing pump: | long-life plastic foam soap pump |
| Dosage quantity: | 0.6 / 1.0 / 1.4 ml/stroke |
| Filling good: | Foam soap |
| Operating type: | touchless |
| Power type: | Battery |
| with/without viewing window: | Clear |
| with drip tray: | No |
| Lock: | SanTRAL vandalism-proof lock, plastic |
| Batteries: | 4x Alkaline D batteries, 1.5 V, exchangeable, non-rechargeable |
| Recommended Batteries: | DURACELL ULTRA POWER D, VARTA 4020 (INDUSTRIAL), VARTA 4120, VARTA 4720 |
| Drive: | X10 system, quiet operating sound (Quiet Drive+) |
| Electronic: | Board with sensors, WiFi module 802.11 b/g/n (Frequency range: 2400 MHz - 2483.5 MHz; WPA and WPA2) and Bluetooth LE (Frequency: 2,404 GHz - 2,480 GHz) |
| Firmware: | Updates and configuration “over-the-air” (OTA) |
| Voltage: | 6 Volt |
| Compliancy: | RoHS |
| CE certification: | EN 300328 Integration verification WLAN, EN 300330 Integration verification NFC, ETSI EN 62311.2008 EMF, ETSI EN 301489-1 EMV |
| Software: | Dispenser with integrated Smart Module enables automatic fill level detection using weight sensors and connection to KANARY as well as third-party platforms |
| Mounting: | Wall mounting with 4 screws and wall plugs, recommended distance to the countertop min. 20 cm |
| Cleaning: | manual wipe disinfection, not dishwashersafe, not autoclavable |
| Warranty: | 5 years |
| Net weight: | 2.628 kg |
| Dimensions (W x H x D) in mm: | 153x358x105 |
| Note: | Before using new products, please always check the compatibility of the product and the dispensing system to ensure proper functionality. |

**Compatible accessories**

| | |
|---|---|
| UDU 5/11 T drip tray<br>Prevents the dripping of the disinfectant off the hand onto the floor | Art. No. 1424771 |
| Stand for UDU 5 T<br>Robust stand for UDU 5 T dispenser | Art. No. 1424789 |

Please see other accessories in our Online Product Catalogue.